


Nirvana: 25 years of performance and comfort

Lasting quality.
Peace of mind that speaks for itself.



**Proudly
Canadian**

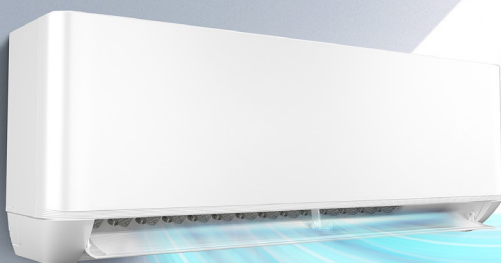

-25°C




Wi-Fi control via Alexa and Google Smart Speakers



Users can easily control the air conditioner from outside the home using a smart device. With cloud connectivity and voice control, the unit can be operated via Alexa and a Google smart speaker.


Low-temperature heating

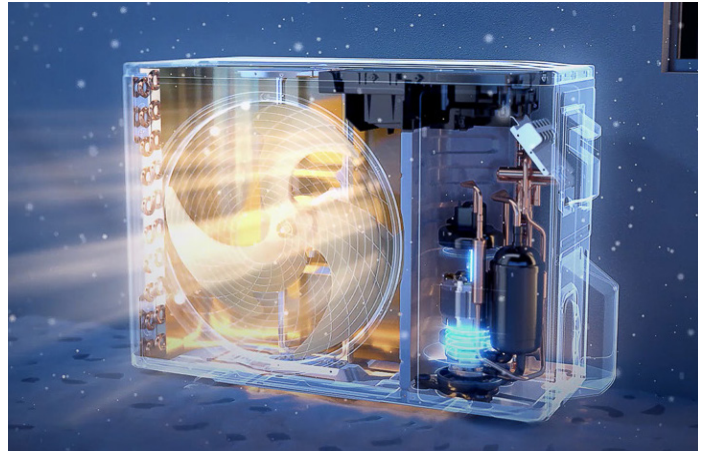

Operates stably even
at an ambient temperature of -25°C

Easy deep cleaning of the indoor unit (IDU) air duct

Filter easily accessible from the top of the indoor unit (IDU)

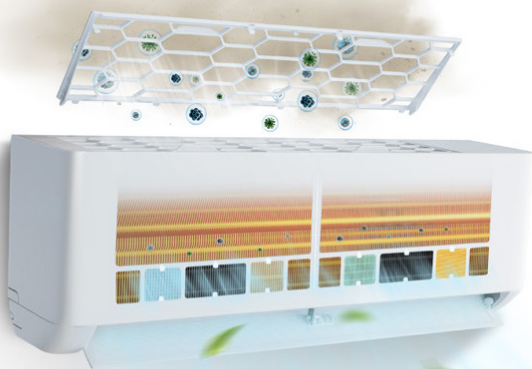

High-density
filter.



The bottom panel, louvers, and fins can be easily removed and reinstalled within 20 minutes, making it easier to clean the duct system, including the cross-flow fan when the unit is turned off.

55°C high-temperature self-cleaning



The evaporator freezes to lock dirt onto the fins, then initiates a defrost cycle to generate a large amount of water that removes the dirt. After rapid drying at 55°C, the evaporator becomes cleaner and more sterile.



Freezing



Defrosting



High-temperature drying at 55°C



Cleaner and more sterilized



Filter cleaning reminder

After a certain period of operation, the air conditioner automatically detects the filter's cleanliness and reminds the user to clean it, preventing excessive bacteria buildup and ensuring healthy air.




Automatic reminder



Health filter

- Photocatalytic filter
- Silver ion filter
- Activated carbon filter
- Catechin filter
- Vitamin C filter
- Catalyst filter

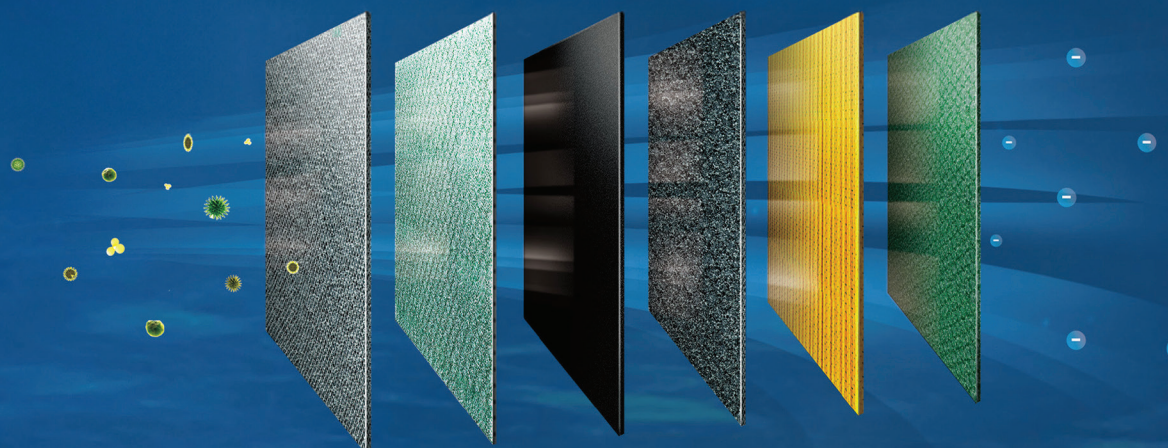

Technical specifications

-25°C



CONFORT SERIES			ZMSB-12HVT-USHHR2	ZMSB-18HVT-USHHR2
ELECTRICAL SUPPLY			208/230V / 60Hz / 1Ph	
Cooling	(95°F / 35°C)	Btu/h	12,000	18,000
	EER2 (95°F / 35°C)	Btu/W.h	13	12.5
	SEER2	Btu/W.h	24	23
Heating	(47°F / 8.3°C)	Btu/h	12,600	19,000
	COP (47°F / 8.3°C)	W/W	3.81	
	HSPF2 Index (Region IV)	Btu/W.h	10	10
	(17°F / -8.3°C)	Btu/h	10,000	15,000
	(5°F / -15°C)	Btu/h	9,100	13,600
	COP (5°F / -15°C)	W/W	2.1	1.8
	Maximum Capacity (-5°F / -20°C)	Btu/h	8,100	11,000
	Maximum Capacity (-13°F / -25°C)	Btu/h	6,550	9,200
AHRI Certification			216032521	216032522
Energy Star + Cold Climate			3893576	3893577
Circuit Breaker		A	15	20
Dehumidifier		Litres/h	1.6	2.2
Indoor Unit Dimensions (L x W x H)		in	36.2 X 7.68 X 12.05	43.3 x 8.74 X 13.1
Outdoor Unit Dimensions (L x W x H)		in	31.8 X 12.0 X 21.65	36.49 X 14.96 X 27.51
Precharged Line Length		(m/ft)	7.5 m / 25 ft	
Maximum Piping Length		(m/ft)	15 m / 50 ft	20 m / 65 ft
Maximum Height Difference Between Indoor and Outdoor Units		(m/ft)	10 m / 33 ft	15 m / 49 ft
Indoor Unit Cooling Sound Level	Turbo / High / Medium / Low / Quiet	DB(A)	46/44/36/32/30	50/47/43/38/34
Outdoor Unit Sound Level		DB(A)	52	53



Timer
24h



Turbo Mode



Display
On/Off



Automatic
Four-way
Swing



High-
temperature
Cooling
(55°C)



Self-
diagnosis



Refrigerant
Leak Detector



Fire-Resistant
Electrical Box



Automatic
Restart



Position
Tracking /
Presence
Detection



Health Filter



Restarts at
8°C



NIRVANA
CONFORT
CONFORT.NIRVANAHP.COM

*Product specifications are subject to change without notice. Images shown are for illustrative purposes only and may not represent the exact model or configuration of the product offered.